


## CAT-3-STANDARD • CAT-3-W10

The economical CAT-3-STANDARD Rewinder Series utilizes Fin-Style Core Holders for 3" diameter cores, and also affords the ability to rewind corelessly. These Rewinders provide a practical alternative/compliment to the CAT-3-CHUCK Rewinder Series.

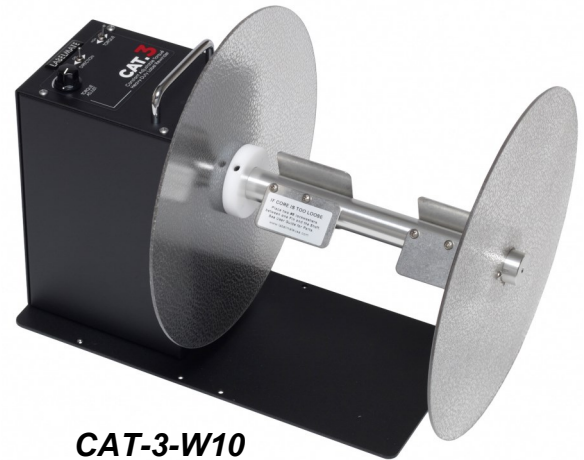

**CAT-3-W10**

Technical Specifications	CAT-3-STANDARD	CAT-3-W10
Max Roll Diameter (in)	12 (305-mm)	
Core Diameter (in)	3 (76-mm)	
Max Media Width (in)	6 (152-mm)	10 (254-mm)
Max Roll Weight (lbs)	17 (432-mm)	
Dimensions-HWD (in)	14 x 12 x 17 (355 x 305 x 432-mm)	14 x 12 x 19 (355 x 305 x 482-mm)
Weight (lbs)	25 (635-mm)	27 (686-mm)
Max Speed (ips)	240 (6096-mm)	
Min Speed (ips)	0.5 (13-mm)	
Max Torque (in-oz) <sup>1,2</sup>	183	
Max RPM <sup>1</sup>	388	
Number of Flanges	2	
Power Specifications <sup>1</sup>	120 - 220VAC in, 12VAC 40W Out	
Warranty	5 year limited warranty on Rewinder - 1 year limited warranty on Power Adaptor	
Available Options	<ul style="list-style-type: none"> <li>• HTO-CAT (High-Torque Option)</li> <li>• LTO-CAT (Low-Torque Option)</li> <li>• FOOTSWITCH</li> </ul>	<ul style="list-style-type: none"> <li>• HTO-CAT (High-Torque Option)</li> <li>• LTO-CAT (Low-Torque Option)</li> <li>• FOOTSWITCH</li> </ul>

1. **HTO-CAT** increases Max Torque to 228 in-oz, Max RPM to 485, 304 ips (7,721-mm), and Power Out to 19VDC 80W. 09.2016.

2. **LTO-CAT** decreases Torque Range to 172 - 35 in-oz.